


ACX-200

ZONES AND OUTPUTS EXPANSION WIRELESS MODULE

The ACX–200 wireless zones and outputs expander is an expansion module that enables wired devices to be included into the ABAX two-way wireless system. It is provided with 4 zones for connecting wired detectors in NO, NC, EOL, 2EOL/NO and 2EOL/NC configurations. The module has 4 relay outputs to operate e. g. sirens, and a tamper switch. The maximum range of wireless communication is 500 m in open area. The device is compatible with INTEGRA 128–WRL control panel, ACU–120, ACU–270 and the older ACU–100 and ACU–250 controllers, as well as with ARU–100 radio signal repeater. The ACX–200 expander complies with EN 50131–3 requirements for Grade 2.

- ABAX wireless interconnect for hardwired security equipment
- 4 zones: NO, NC, EOL, 2EOL/NO, 2EOL/NC configurations support
- 4 independent relay outputs
- tamper protection

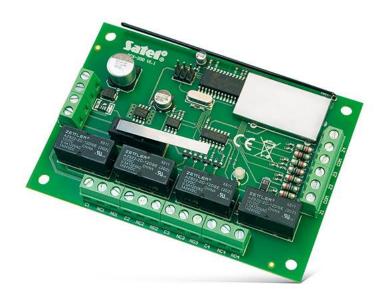

TECHNICAL DATA

Environmental class	
Supply voltage	12 V DC
Enclosure dimensions	126 x 158 x 32 mm
Operating temperature range	-10+55 °C
Operating frequency range	868,0 ÷ 868,6 MHz
Standby mode current consumption	130 mA
Max. current consumption	140 mA
Weight	223 g
Maximum humidity	93±3%
Radio communication range (in open area)	up to 500 m m
Complied with standards	EN 50130-4, EN 50130-5, EN 50131-1, EN 50131-3, EN 50131-5-3
Name of certification body	Telefication
Security grade according to EN50131-3	Grade 2
Relay outputs rating (resistive load)	1000 mA / 24 VDC

